

Fabric Storage Basket

Finished size: 8 in wide × 4 in deep × 6 in high



1 in square



25.4 mm / 1 in

Print at 100% / Actual Size. Disable Fit to page and printer scaling. Measure BOTH squares in both directions before cutting fabric.

Scale check: each side must be 1 in (25.4 mm). Measured: _____ in. If either square is wrong, correct print settings and reprint.

Included: rectangle cutting chart, full–size shaped templates where needed, solid cutting lines, dashed stitching lines, grain / fold marks and assembly steps. Rectangle charts are measurements, not scale drawings.

Seam allowance included: 0.375 in.

Materials

• 1/2 yard each outer and lining woven cotton (42 in usable width).

• 1/2 yard medium–weight fusible interfacing at least 26 in wide; thread, ruler, clips and iron. Follow the fusible manufacturer's care instructions.

Cutting chart and pattern notes

Measure rectangle pieces directly on fabric. Template dimensions describe the paper cutting boundary; seam allowance is already included.

Piece / kind	Cut size (inches)	Quantity / grain
Basket outer (chart)	12.75 in × 8.75 in	Cut 2 from outer fabric. Height parallel to selvage.
Basket lining (chart)	12.75 in × 8.75 in	Cut 2 from lining fabric. Height parallel to selvage.
Basket interfacing (chart)	12.75 in × 8.75 in	Cut 2 from medium–weight fusible interfacing. Height parallel to selvage.
Corner cut–out guide (template)	2 in × 2 in	Paper guide only; remove this square from both bottom corners of every rectangle. Align to raw bottom and side edges.

Seam allowance is included. This is a fabric organizer, not a load–rated carrier.


Dashed lines on the Corner cut–out guide show seam offsets for reference; do not stitch the paper guide or sew around its four edges.

All dimensions are inches (in); 1 in = 25.4 mm. Fabric thickness affects the final measurements slightly.

Corner cut–out guide

Tile 1,1 of 1 × 1 | 100% / Actual Size | Solid: cut; dashed: stitch

Align matching registration crosses; retain the 0.5 in overlap. Do not scale.

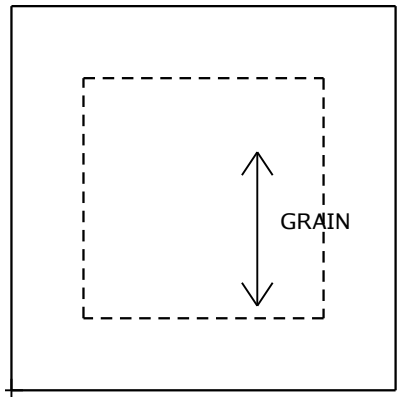

Paper guide only; remove this square from both bottom corners of every rectangle

Assembly instructions

1. Cut Basket outer, Basket lining and Basket interfacing: two rectangles each, 12.75 in × 8.75 in. Fuse Basket interfacing to the wrong sides of Basket outer following its instructions; let cool flat.

2. Use Corner cut–out guide to mark 2 in × 2 in squares measured from RAW edges at both bottom corners of all four fabric rectangles (including fused interfacing). Cut out the squares before sewing. Do not measure from a seam line.

3. Place Basket outer pieces right sides together. Sew both sides and the bottom at 0.375 in, stopping at the cut–outs. Press seams open. Leave the top open.

4. Pinch each cut–out open, matching the side and bottom seam lines. Sew across each flattened raw cut–out edge at 0.375 in. This produces a 4 in base depth. Repeat for Basket lining, leaving a 3 in turning gap in its bottom seam.

5. Turn Basket outer right side out; keep Basket lining wrong side out. Place outer inside lining with right sides together. Match side seams and stitch the top rim at 0.375 in.

6. Turn through the lining gap; fold gap edges inward by the seam allowance and stitch closed. Nest lining inside outer, press the rim and topstitch 0.125 in below it. No handles or fold–over cuff are included.